



AACER™

SPORTS FLOORING

AacerFlex™

AacerFlex™ is a performance sports floor system which meets the ergonomic needs of today's athlete through sufficient force reduction, increased energy return, as well as outstanding ball rebound characteristics. AacerFlex's unique pad minimizes potential deadspots by increasing pad surface contact area without compromising the load bearing ability of the system.



see us at
Sweets.com



The mark of responsible forestry

FLOATING



AacerFlex™


AacerFlex™ incorporates precision engineered pads that integrates load bearing ability with enhanced athletic performance. AacerFlex can be specified for multipurpose rooms, competitive sports applications and dance/aerobics. Available in AacerFlex™, AacerFlex™ TP and AacerFlex™ EN-DIN.




- ① Precision milled Acer Maple
- ② 2 layers of 15/32" (12mm) NOM. Exposure 1 APA rated sheathing
- ③ 3/4" TriPower™ Pad

Certified	
Green Status LEED Contributors	<p>FSC® Certified Maple - MRC7 FSC® Certified Subfloor Components - MRC7 EQ - 4.2 Regional Materials - MRc5.1 & 5.2</p>
Optional Versions	<p>50 duro blue, 60 duro black, 70 duro red TriPower™, AacerFlex, EcoDIN, 1/2" TriPower™ Pad <i>*additional pad options available</i></p>
Resilience	Aacer TriPower™ Pad
Slab Depression	<p>3/4" (19mm) TriPower™ Pad, AacerFlex 25/32" (20mm) flooring - 2 1/2" (64mm) 33/32" (26mm) flooring - 2 3/4" (70mm)</p> <p>1/2" (12mm) TriPower™ Pad 25/32" (20mm) flooring - 2 1/4" (57mm) 33/32" (26mm) flooring - 2 1/2" (64mm)</p> <p>7/16" (11mm) EcoDIN Pad 25/32" (20mm) flooring - 2 1/8" (55mm) 33/32" (26mm) flooring - 2 3/8" (60mm)</p>
Subfloor Construction	Plywood
System Type	Floating System
Testing Laboratory	
Warranty	Lifetime available

WALL BASE

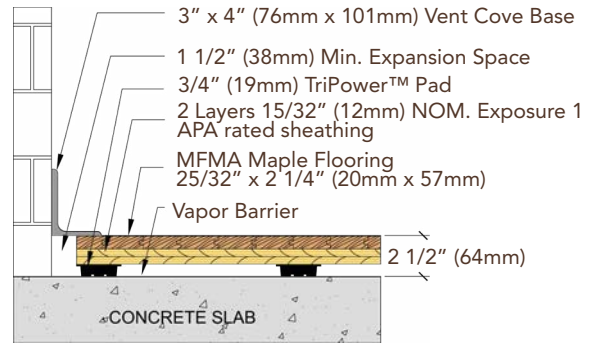

THRESHOLD

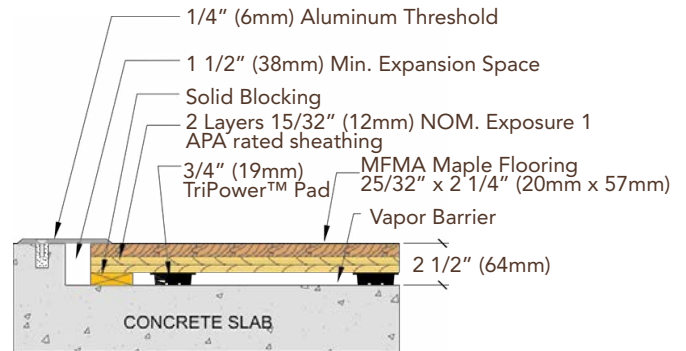

EQUIPMENT

