


























## **FLOATING**



## ScissorLoc<sup>TM</sup> III

Available ScissorLoc<sup>™</sup> Floor Systems: I, II, III, DC and LP

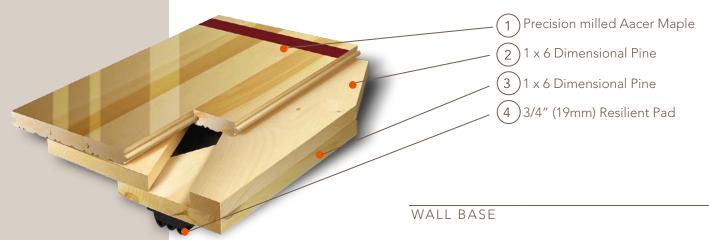

Certified



**Green Status LEED Contributors** 



FSC® Certified Maple - MRc7  $FSC^{\otimes}$  Certified Subfloor Components - MRc7 EQ - 4.2

Regional Materials - MRc5.1 & 5.2

**Optional Versions** 

I, II, III, DC, LP, PowerVent™

Resilience

3/4" Performance, TriPower Pad

Slab Depression

ScissorLoc™ III with 3/4" (19mm) Performance, TriPower Pad

25/32" (20mm) flooring - 3" (76mm) 33/32" (26mm) flooring - 3 1/4" (83mm)

Retrofit

System may be adjusted to fit any slab profile

**Subfloor Construction** 

Solid Pine

System Type

Floating System

**Testing Laboratory** 








U.S. Patent#


#5,299,401


Warranty

Lifetime available



## THRESHOLD





It is the policy of Aacer Flooring to continuously imporve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser July 2016

AacerFlooring.com 877.582.1181