






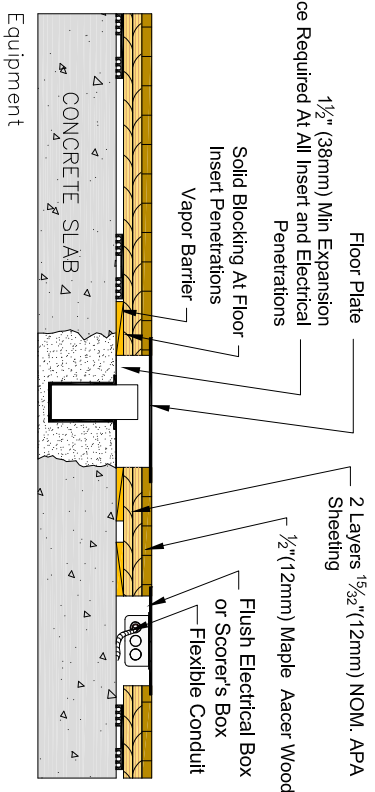
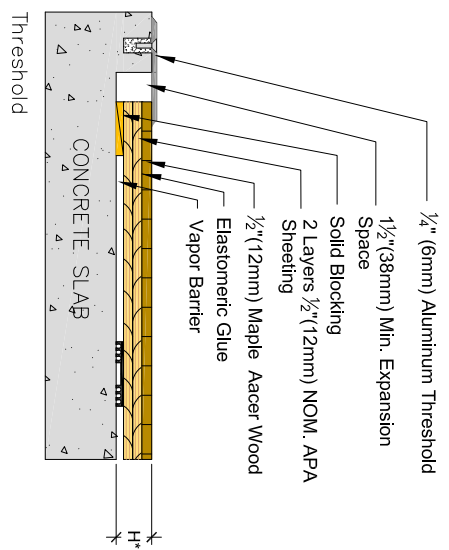
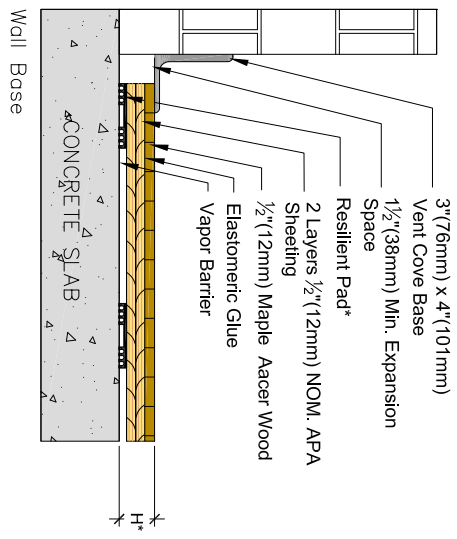


# Aacer SuperBond Flex™

Resilient Pad Options*	Pad Description	Profile Height (H*)
	3/4" (19mm) Tri-Power Pad, Available in 3 ASTM Harnesses - 50, 60, 70	2 3/8" (60mm)
	3/4" (19mm) Aacer Flex	2 3/8" (60mm)
	1/2" (12mm) Tri-Power Pad, ASTM Harness 55	2 1/8" (54mm)
	1/2" Performance Foam	2 1/8" (54mm)
	7/8" (11mm) EcoDin	2" (52mm)
	3/8" (10mm) AacerCush	2" (51mm)
	1/2" Performance Foam	1 7/8" (48mm)

\* Refer to key for pad options and system heights



## REVISIONS

I.D.	DESCRIPTION	WHEN	WHO
—			

Aacer Flooring  
970 Ogdan Rd  
Peshigo, WI 54157

Phone: 715-582-1181  
Fax: 715-582-1182

## Aacer SuperBond Flex

DESCRIPTION:  
PART NUMBER:  
SCALE: n/d

DATE: 3-24-2015

DRAWN BY: S Doniel  
CHECKED BY:

FILE: AacerSuperBondFlex

SHEET: 1

