

FLOATING



SuperBond Flex™


Aacer SuperBond Flex™ is a mastic set edge-grain maple parquet adhered to a floating subfloor system. Used in sport floor applications where system height is a factor.




- 1 1/2" MFMA Maple SuperBond™ Flooring
- 2 Elastomeric Glue
- 3 2 Layers of 15/32" (12mm) NOM. APA Plywood
- 4 Resilient Pads, AcerFlex

Certified	
Green Status LEED Contributors	 FSC® Certified Maple - MRc7 FSC® Certified SubFloor Components - MRc7 EQ - 4.2 Regional Materials - MRc5.1 & 5.2
Resilience	Aacer Flex Pad, EcoDIN Pad, TriPower™ Pad, AacerCush Pad, Foam Pad
Slab Depression	3/4" (20mm) EPDM Pads 1/2" (12mm) flooring - 2 1/4" (57mm) 7/16" (10mm) EcoDin Pads 1/2" (12mm) flooring - 2" (51mm)
Subfloor Construction	Plywood
System Type	Floating System
Testing Laboratory	
Warranty	Lifetime available


WALL BASE

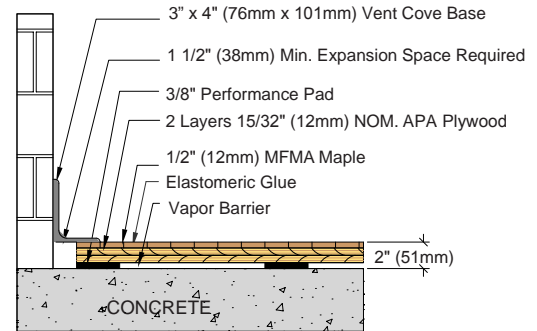

THRESHOLD

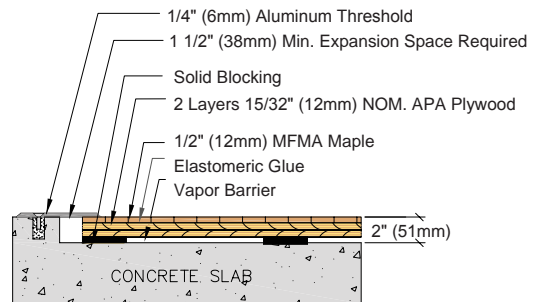

EQUIPMENT

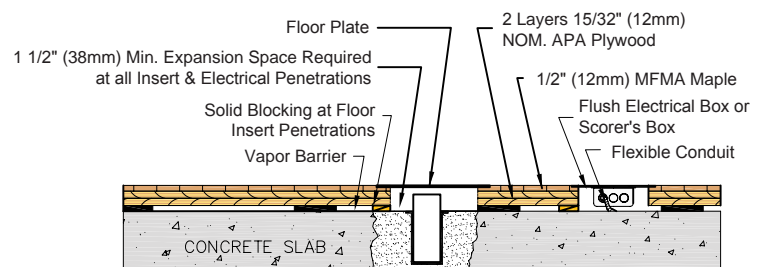

AacerFlooring.com (877) 582-1181

It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.

August 2014