
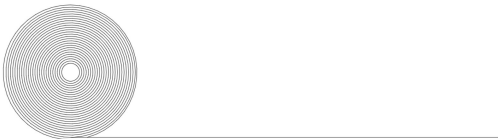


AacerFlex VLP

Floor System Components



<p style="text-align: center;">Components Provided by Aacer Sports Flooring</p>	<p style="text-align: center;">Components Provided by Installer AVAILABLE FROM AACER *</p>
<p><u>Subfloor Panels:</u> 16 SF per Panel Pre-assembled subfloor panels - 1/4" closed cell foam provided in 1000 sq ft rolls and installed separately</p>  <p>1/4" Closed Cell Foam Blanket 1 SF per SF</p>  <p><small>NOTE: Quantities shown do not include waste.</small></p>	<p><u>Vapor Retarder</u> * 1 SF per SF</p> <p><u>3/4" Subfloor Staples</u> * 0.75 per SF</p> <p><u>1-3/4" Flooring Cleats or Staples</u> * 5.8 per SF - When installing 2-1/4" Flooring - Fasteners applied 10" to 12" OC</p> <p style="text-align: center;">OR</p> <p>8.7 per SF - If installing 1-1/2" Flooring - Fasteners applied 10" to 12" OC</p> <p><u>1/4" Solid Blocking</u></p> <p><u>Duct Tape</u> for Vapor Retarder</p>