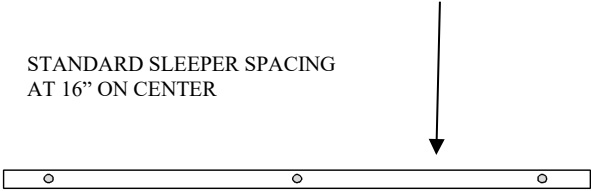





# Anchored PowerSleeper Floor System Components



<p style="text-align: center;"><b>Components Provided by Aacer Sports Flooring</b></p>	<p style="text-align: center;"><b>Components Provided by Installer AVAILABLE FROM AACER *</b></p>
<p><u>Sleepers</u> <b>10.67 SF per Sleeper</b></p> <p>8' plywood sleepers with pre-drilled anchor pockets and resilient pads pre-attached.</p> <p style="text-align: center;">STANDARD SLEEPER SPACING AT 16" ON CENTER</p> <div style="text-align: center;">  </div> <p><u>Anchor Assemblies</u> <b>0.28 Anchor Assemblies per SF</b></p> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <p>2-1/2" STEEL SPIKE ANCHOR</p> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <p>SEALED WASHER</p> </div> <div style="display: flex; align-items: center;">  <p>1" Rubber Bushing</p> </div> <p style="font-size: small; margin-top: 20px;">NOTE: Quantities shown do not include waste.</p>	<p><u>Vapor Retarder</u> * <b>1 SF per SF</b></p> <p><u>15/32" Plywood Subfloor</u> <b>32 SF per Sheet</b></p> <p><u>1" Subfloor Staples</u> * <b>1.125 per SF</b></p> <p><u>2" Flooring Cleats or Staples</u> * <b>5.8 per SF</b></p> <ul style="list-style-type: none"> <li>- When installing 2-1/4" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p style="text-align: center;">OR</p> <p><b>8.7 per SF</b></p> <ul style="list-style-type: none"> <li>- If installing 1-1/2" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p><u>1/2" Solid Blocking</u> (FOR STANDARD PADS)</p> <p><u>Duct Tape</u> for Vapor Retarder</p> <p style="text-align: center; margin-top: 20px;"><i>Note: Concrete anchors require 1/4" masonry bits</i></p>