

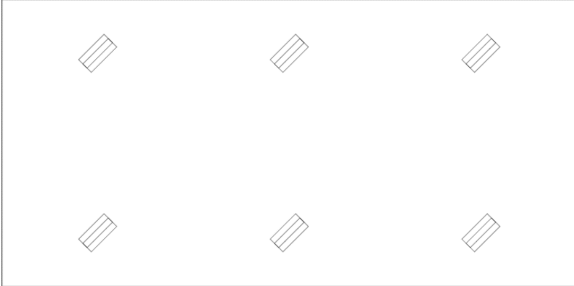



PowerPlay Panel

Floor System Components

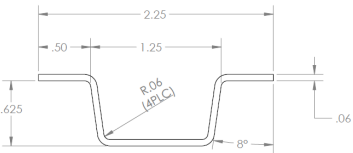

<p style="text-align: center;">Components Provided by Aacer Sports Flooring</p>	<p style="text-align: center;">Components Provided by Installer AVAILABLE FROM AACER *</p>
<p><u>Subfloor Panels:</u> 32 SF per Panel</p> <p>Prefabricated subfloor panels with resilient pads attached and machined anchor pockets provided.</p>  <p><u>Sectional Steel Channels</u> 0.188 per SF</p>   <p><u>1-1/4" Concrete Anchor Pins</u> 0.188 per SF</p>  <p>NOTE: Quantities shown do not include waste.</p>	<p><u>Vapor Retarder</u> *</p> <p>1 SF per SF</p> <p><u>1-3/4" Flooring Cleats or Staples</u> *</p> <p>5.8/per SF</p> <ul style="list-style-type: none"> - If installing 2-1/4" Flooring - Fasteners applied 10" to 12" <p>8.7 per SF</p> <ul style="list-style-type: none"> - If installing 1-1/2" Flooring - Fasteners applied 10" to 12" OC <p><u>3/8" Solid Blocking</u></p> <p><u>Duct Tape</u> for Vapor Retarder</p> <p style="text-align: right;"><i>Note: Concrete anchors require 1/4" masonry bits</i></p>

