

MP Court PVC

SYNTHETIC SURFACES

MP Court PVC, a cushion-backed vinyl sports flooring system, provides a durable shock absorbing surface for indoor recreational play.


The product features a long-lasting surface manufactured with a closed-cell, high-density foam and a reinforced fiberglass inter-layer resulting in excellent linear and dimensional stability.

The vinyl wear layer provides excellent traction and durability. Its heavy foam back provides resiliency and comfort for athletes. It is also bacteria and microbe resistant.



MP Court PVC

MP Court PVC is an indoor resilient athletic surface. It is ideal for basketball and volleyball courts.

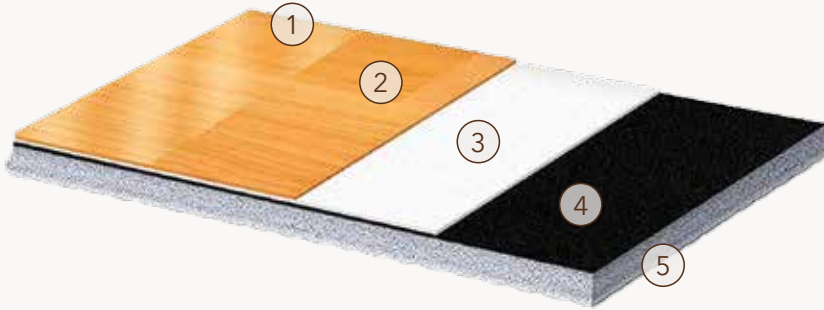

- 1. UV Cured Polyurethane Protection Layer
- 2. Durable Wear Layer
- 3. Fiberglass Mesh Interlayer
- 4. Calendared PVC Layer
- 5. Closed Cell Foam Cushioned Backing

STANDARD COLORS

Colors are representational only. Contact Aacer for actual color samples.



Maple Wood Design



Cherry Wood Design



Dark Blue



Dark Green



Red



Gray

OTHER COLORS AVAILABLE*

*Longer lead times apply. Colors are representational only.



Sky Blue



Yellow



Blue



Orange



Indian Cherry



Noble Zelkova



Tiger Oak



Windsor Oak



Antique Oak



Beige

Custom colors & logos available.

Total Thickness	6.5mm / 0.256"-90
Wear Layer Thickness	2.1mm / 0.08"
Roll Width	1.8m / 5.91' = 5'10"
Roll Length	15m / 49.2' = 49'2"
Weight	4.2kg/m ² / 0.861 lbs./sq. ft.
Seam Treatment	Heat Weld
Shore A Hardness ASTM D2240	85 - 90
Force Reduction DIN 18032-2	33%
Coefficient of Friction DIN 18032-2	0.4 - 0.44
Vertical Deformation DIN 18032-2	0.9mm
Area Deflection DIN 18032-2	0%
Static Load Limit / Residual Compression ASTM F970-00	0.003, 250 lbs. 0.005, 500 lbs.
Ball Rebound DIN 18032-2	99%
Rolling Load DIN 18032-2	1000N
Impact Resistance DIN 18032-2	12Nm
Residual Impression DIN 18032-2	0.17mm
Critical Radiant Flux ASTM E648	0.36W/cm ² , Class 1
Chemical Resistance ASTM D543	Excellent
Loss of Heating KS M 38002-99	0.9%
Dimensional Stability by Heating KS M 38002-99	0.3%
Evaluation of Microbial Action ASTM G21-96	Class 0
Bacterial Reduction Rate FC-TM-20-01	99.8%

It is the policy of Aacer Flooring to continuously improve its line of products. Therefore, Aacer Flooring reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.



see us at
Sweets.com

