






ScissorLoc V-Hex AR

Floor System Components

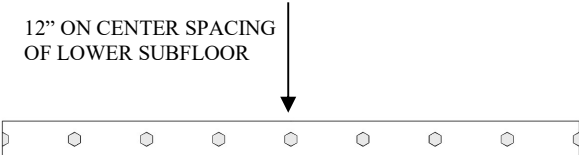

<p style="text-align: center;">Components Provided by Aacer</p>	<p style="text-align: center;">Components Provided by Installer AVAILABLE FROM AACER *</p>
<p><u>Lower Subfloor</u> 1.0 LF Lineal Foot per SF</p> <p>1 x 6 (3/4 x 5-1/2") pine with resilient VERT pads pre-attached. (Board lengths range from 6' to 12')</p> <div style="text-align: center;"> <p>12" ON CENTER SPACING OF LOWER SUBFLOOR</p>  </div> <div style="text-align: center; margin-top: 20px;">  <p>2" SPACING OF UPPER SUBFLOOR</p> </div> <p><u>Upper Subfloor</u> 1.6 LF Lineal Feet per SF</p> <p>1 x 6 (1/2" x 5-1/2") pine. (Board lengths range from 6' to 16')</p> <p><u>Anchor Assemblies</u> 0.375 Anchor Assemblies per SF</p> <div style="display: flex; align-items: center; margin-top: 10px;">  <p>STEEL SPIKE ANCHOR</p> </div> <div style="display: flex; align-items: center; margin-top: 5px;">  <p>SEALED WASHER</p> </div> <div style="display: flex; align-items: center; margin-top: 5px;">  <p>RUBBER BUSHING</p> </div> <p style="font-size: small; margin-top: 10px;">NOTE: Quantities shown do not include waste.</p>	<p><u>Vapor Retarder</u> * 1 SF per SF</p> <p><u>1" Subfloor Staples</u> * 3.6 per SF</p> <p><u>2" Flooring Cleats or Staples</u> * 5.8 per SF</p> <ul style="list-style-type: none"> - When installing 2-1/4" Flooring - Fasteners applied 10" to 12" OC <p style="text-align: center; margin: 10px 0;">OR</p> <p>8.7 per SF</p> <ul style="list-style-type: none"> - If installing 1-1/2" Flooring - Fasteners applied 10" to 12" OC <p><u>1/4" Solid Blocking</u></p> <p><u>Duct Tape</u> for Vapor Retarder</p> <p style="text-align: center; margin-top: 20px;"><i>Note: Concrete anchors require 1/4" masonry bits</i></p>

REV A-22