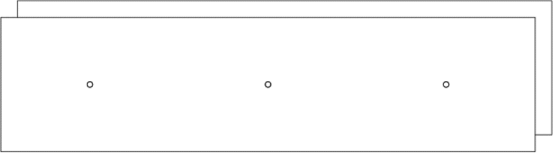





AacerChannel VLP



Floor System Components

Components Provided by Aacer Sports Flooring	Components Provided by Installer AVAILABLE FROM AACER *
<p><u>Subfloor Panels:</u> 16 SF per Panel</p> <p>Pre-assembled subfloor panels with resilient pads attached and pre-drilled anchor pockets provided.</p>  <p><u>Anchor Assemblies</u> 0.188 Anchor Assemblies per SF</p> <div style="display: flex; align-items: center;">  <div style="margin-left: 10px;">STEEL SPIKE ANCHOR</div> </div> <div style="display: flex; align-items: center; margin-top: 10px;">  <div style="margin-left: 10px;">SEALED WASHER</div> </div> <div style="display: flex; align-items: center; margin-top: 10px;">  <div style="margin-left: 10px;">RUBBER SLEEVE</div> </div> <p><small>NOTE: Quantities shown do not include waste.</small></p>	<p><u>Vapor Retarder</u> * 1 SF per SF</p> <p><u>3/4" Subfloor Staples</u> * 0.813 per SF</p> <p><u>1-3/4" Flooring Cleats or Staples</u> * 5.8 per SF</p> <ul style="list-style-type: none"> - When installing 2-1/4" Flooring - Fasteners applied 10" to 12" OC <p style="text-align: center;">OR</p> <p>8.7 per SF</p> <ul style="list-style-type: none"> - If installing 1-1/2" Flooring - Fasteners applied 10" to 12" OC <p><u>1/2" Solid Blocking</u></p> <p><u>Duct Tape</u> for Vapor Retarder</p> <p style="text-align: right;"><i>Note: Concrete anchors require 1/4" masonry bits</i></p>