


# PowerLoc

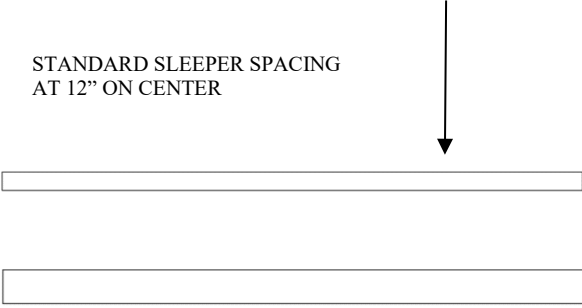

## Floor System Components

| <p>Components<br/>Provided by<br/>Aacer Sports Flooring</p>  | <p>Components<br/>Provided by Installer<br/>AVAILABLE FROM AACER *</p>  |
|--|---|
| <p><u>Sleepers</u><br/><b>8.0 SF per Sleeper</b></p> <p>8' plywood sleepers with resilient pads pre-attached.</p> <div style="text-align: center;"> <p>STANDARD SLEEPER SPACING<br/>AT 12" ON CENTER</p>  </div> <p>2" SPACING OF<br/>UPPER SUBFLOOR</p> <p><u>Upper Subfloor</u><br/><b>1.6 LF Lineal Feet per SF</b></p> <p>1 x 6 (1/2" x 5-1/2") pine.<br/>(Board lengths range from 6' to 16')</p> <p>NOTE: Quantities shown do not include waste.</p> | <p><u>Vapor Retarder</u> *<br/><b>1 SF per SF</b></p> <p><u>1" Subfloor Staples</u> *<br/><b>3.2 per SF</b></p> <p><u>2" Flooring Cleats or Staples</u> *<br/><b>5.8 per SF</b></p> <ul style="list-style-type: none"> <li>- When installing 2-1/4" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p style="text-align: center;">OR</p> <p><b>8.7 per SF</b></p> <ul style="list-style-type: none"> <li>- If installing 1-1/2" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p><u>1/2" Solid Blocking</u></p> <p><u>Duct Tape</u><br/>for Vapor Retarder</p> |