




# PowerPlay Panel

## Floor System Components

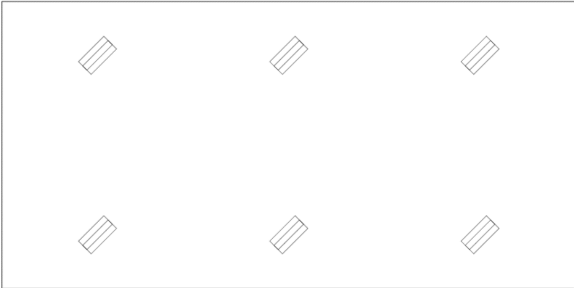

<p>Components Provided by Aacer Sports Flooring</p>	<p>Components Provided by Installer AVAILABLE FROM AACER *</p>
<p><u>Subfloor Panels:</u> <b>32 SF per Panel</b></p> <p>Prefabricated subfloor panels with resilient pads attached and machined anchor pockets provided.</p>  <p><u>Sectional Steel Channels</u> <b>0.188 per SF</b></p>  <p><u>Concrete Anchor Pins</u> <b>0.188 per SF</b></p>  <p>NOTE: Quantities shown do not include waste.</p>	<p><u>Vapor Retarder</u> * <b>1 SF per SF</b></p> <p><u>1-1/2" Flooring Cleats or Staples</u> * <b>5.8 per SF</b></p> <ul style="list-style-type: none"> <li>- When installing 2-1/4" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p>OR</p> <p><b>8.7 per SF</b></p> <ul style="list-style-type: none"> <li>- If installing 1-1/2" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p><u>3/8" Solid Blocking</u></p> <p><u>Duct Tape</u> for Vapor Retarder</p> <p><i>Note: Concrete anchors require 1/4" masonry bits</i></p>