



# Programme Stage I

## Floor System Components

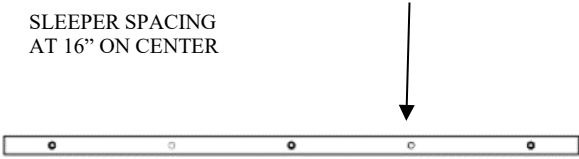

<b>Components Provided by Aacer Sports Flooring</b>	<b>Components Provided by Installer</b> <b>AVAILABLE FROM AACER*</b>
<p><u>Sleepers</u>  <b>8.0 SF per Sleeper</b></p> <p>8' plywood sleepers with pre-drilled anchor pockets and resilient pads pre-attached.</p> <p>SLEEPER SPACING AT 16" ON CENTER</p>  <p><u>Anchor Assemblies</u>  <b>0.28 Anchor Assemblies per SF</b></p> <div style="display: flex; align-items: center;">  <div style="margin-left: 10px;"> <p>STEEL SPIKE ANCHOR</p> <p>SEALED WASHER</p> <p>RUBBER BUSHING</p> </div> </div> <p>NOTE: Quantities shown do not include waste.</p>	<p><u>Vapor Retarder</u>*  <b>1 SF per SF</b></p> <p><u>23/32" Plywood Subfloor</u>  <b>32 SF per Sheet</b></p> <p><u>1-1/2" Subfloor Staples</u>*  <b>1.125 per SF</b></p> <p><u>2" Flooring Cleats or Staples</u>*  <b>5.8 per SF</b></p> <ul style="list-style-type: none"> <li>- When installing 2-1/4" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p style="text-align: center;">OR</p> <p><b>8.7 per SF</b></p> <ul style="list-style-type: none"> <li>- If installing 1-1/2" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p><u>1/4" Solid Blocking</u></p> <p><u>Duct Tape</u>  for Vapor Retarder</p> <p style="text-align: right;"><i>Note: Concrete anchors require 1/4" masonry bits</i></p>