



ASSEMBLED COMPONENTS

MultiStage HC LP

Rev A

Date: 1-14-22

Rev B

Date :

ULAMSHCLP12E


Coverage: 16 SF Per Panel

Requires:


- 16 SF of 23/32" Ply
- 16 ea 2" Diameter ECO Pads
- 3 ea Channels / 1-1/2" Anchors

Manufactured from one layer of 23/32" x 2' x 8' Plywood Sheathing


Top View - Anchor Pocket Locations

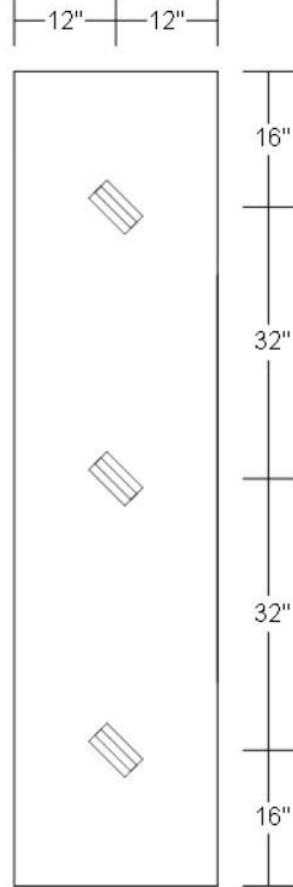

ANCHOR POCKET

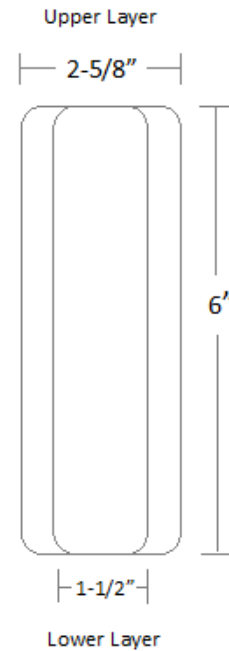


Top View - Resilient Pad Locations

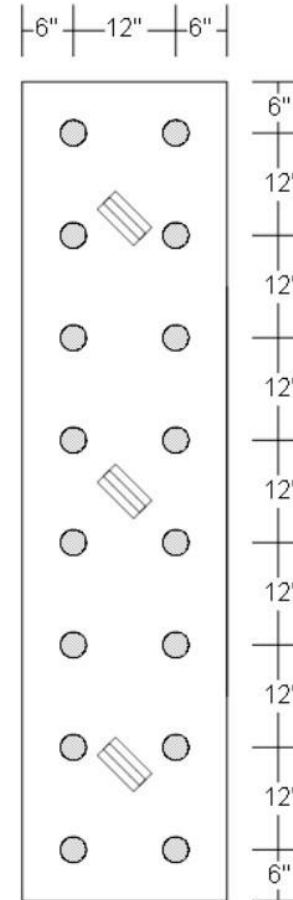

1/2" x 2" Diameter ECO Pads
at Recessed Locations

End View - Recessed Resilient Pads

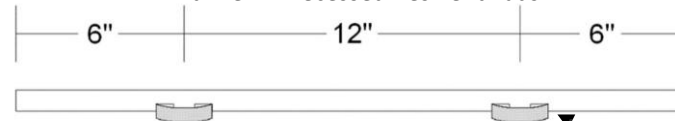

1/4" deep x 2" diameter recessed pocket
with 1/8" x 3/4" downward protrusion