





# AacerCush I Anchored Floor System Components

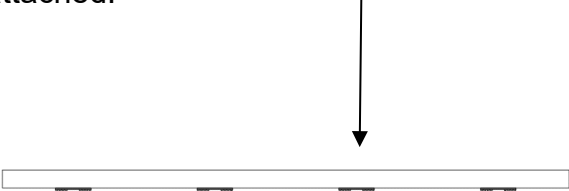

<p style="text-align: center;"><b>Components Provided by Aacer Sports Flooring</b></p>	<p style="text-align: center;"><b>Components Provided by Installer AVAILABLE FROM AACER *</b></p>
<p><u>Softwood Sleepers:</u> <b>3 SF per Sleeper at 9" On Center</b></p> <p><b>2.67 SF per Sleeper if at 8" On Center</b></p> <p>4' softwood sleepers with pre-drilled anchor pockets and resilient pads pre-attached.</p> <div style="text-align: center;">  </div> <p><u>Anchor Assemblies</u> <b>0.67 per SF with sleepers at 9" OC</b></p> <p><b>0.75 per SF with sleepers at 8" OC</b></p> <div style="display: flex; align-items: center; margin-top: 20px;"> <div style="margin-right: 10px;">      </div> <div> <p>2-1/2" STEEL SPIKE ANCHOR</p> <p>SEALED WASHER</p> <p>1" RUBBER BUSHING</p> </div> </div> <p style="margin-top: 20px;">NOTE: Quantities shown do not include waste.</p>	<p><u>Vapor Retarder</u> *</p> <p><b>1 SF per SF</b></p> <p><u>2" Flooring Cleats or Staples</u> *</p> <p><b>7.1 per SF</b> -!When installing 2-1/4" Flooring! over Sleepers at 9" OC</p> <p><b>8.0 per SF</b> -!When installing 2-1/4" Flooring! over Sleepers at 8" OC</p> <p style="text-align: center;">OR</p> <p><b>10.67 per SF</b> -!If installing 1-1/2" Flooring over Sleepers at 9" OC</p> <p><b>12.0 per SF</b> -!If installing 1-1/2" Flooring! Over Sleepers at 8" OC</p> <p><u>3/8" Solid Blocking</u></p> <p><u>Duct Tape</u> for Vapor Retarder</p>