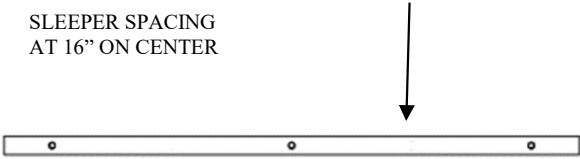





Programme Stage I

Floor System Components

<p style="text-align: center;">Components Provided by Aacer Sports Flooring</p>	<p style="text-align: center;">Components Provided by Installer AVAILABLE FROM AACER*</p>
<p><u>Sleepers</u> 8.0 SF per Sleeper</p> <p>8' plywood sleepers with pre-drilled anchor pockets and resilient pads pre-attached.</p> <p style="text-align: center;">SLEEPER SPACING AT 16" ON CENTER</p>  <p><u>Anchor Assemblies</u> 0.28 Anchor Assemblies per SF</p>  <p style="text-align: center;">2-1/2" STEEL SPIKE ANCHOR</p>  <p style="text-align: center;">SEALED WASHER</p>  <p style="text-align: center;">3/4" RUBBER BUSHING</p> <p>NOTE: Quantities shown do not include waste.</p>	<p><u>Vapor Retarder</u>* 1 SF per SF</p> <p><u>23/32" Plywood Subfloor</u> 32 SF per Sheet</p> <p><u>1-3/4" Subfloor Staples</u>* 1.125 per SF</p> <p><u>2" Flooring Cleats or Staples</u>* 5.8 per SF</p> <ul style="list-style-type: none"> - When installing 2-1/4" Flooring - Fasteners applied 10" to 12" OC <p style="text-align: center;">OR</p> <p>8.7 per SF</p> <ul style="list-style-type: none"> - If installing 1-1/2" Flooring - Fasteners applied 10" to 12" OC <p><u>1/4" Solid Blocking</u></p> <p><u>Duct Tape</u> for Vapor Retarder</p> <p style="text-align: right;"><i>Note: Concrete anchors require 1/4" masonry bits</i></p>