





# AacerChannel VLP HC Eco

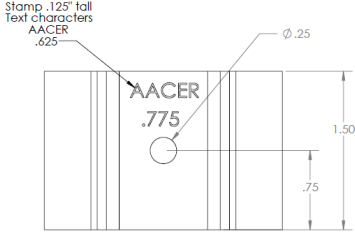

## Floor System Components

| <p style="text-align: center;"><b>Components<br/>Provided by<br/>Aacer Sports Flooring</b></p>  | <p style="text-align: center;"><b>Components<br/>Provided by Installer<br/>AVAILABLE FROM AACER *</b></p>   |
|---|---|
| <p><u>Subfloor Panels:</u><br/><b>16 SF per Panel</b></p> <p>Pre-assembled subfloor panels with resilient pads attached and machined anchor pockets provided.</p>  <p><u>Sectional Steel Channels</u><br/><b>0.125 per SF</b></p>   <p><b>1-1/4" Concrete Anchor Pins</b><br/><b>0.125 per SF</b></p>  <p>NOTE: Quantities shown do not include waste.</p> | <p><u>Vapor Retarder</u> *<br/><b>1 SF per SF</b></p> <p><u>3/4" Subfloor Staples</u> *<br/><b>0.813 per SF</b></p> <p><u>1-3/4" Flooring Cleats or Staples</u> *<br/><b>5.8 per SF</b></p> <ul style="list-style-type: none"> <li>- When installing 2-1/4" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p style="text-align: center;">OR</p> <p><b>8.7 per SF</b></p> <ul style="list-style-type: none"> <li>- If installing 1-1/2" Flooring</li> <li>- Fasteners applied 10" to 12" OC</li> </ul> <p><u>1/2" Solid Blocking</u></p> <p><u>Duct Tape</u><br/>for Vapor Retarder</p> <p style="text-align: right;"><i>Note: Concrete anchors require 1/4" masonry bits</i></p> |